




PRODUCT NAME : Cirque LED Pendant  
ITEM NUMBER: E22843-MW

Please consult your electrician for hanging fixture and wiring.

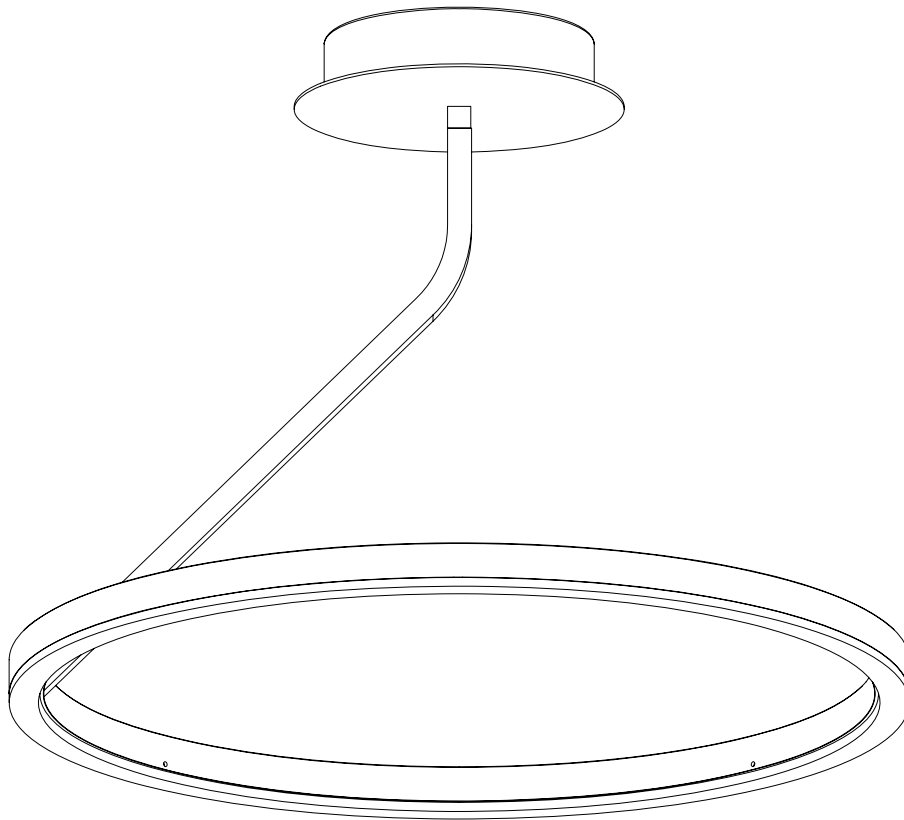

**WARNING: WIRES NEED TO BE CONNECTED TO DRIVER FOUND IN CANOPY AND SHOULD NOT CONNECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.**

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.


Below is a list of recommended dimmers:

Lutron MACL-153M  
Lutron DVL-153P  
Lutron SCL-153P  
Leviton IPL06-10Z  
Leviton 6674-POW


Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

43W LED


**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation



Bracket (A)




Canopy (B)




Body (C)

Locate all hardware & components before discarding packaging

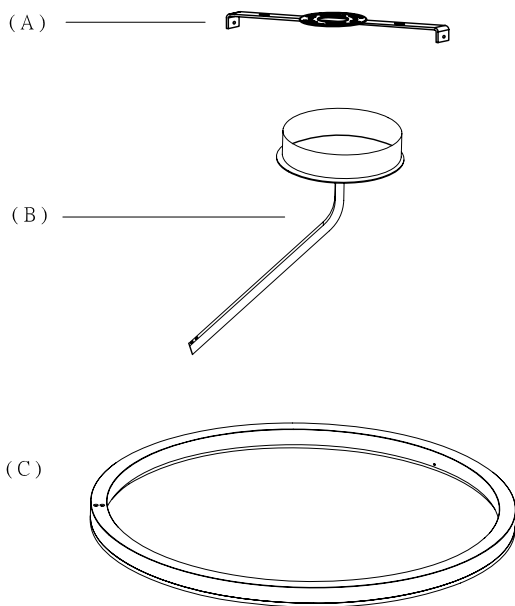


1.)

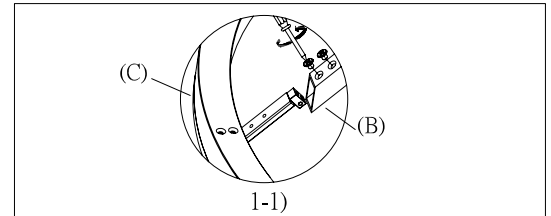


Step.1: First connect the lamp body (C) to stem connected to canopy (B) using the male tab and screw to secure.

2.)

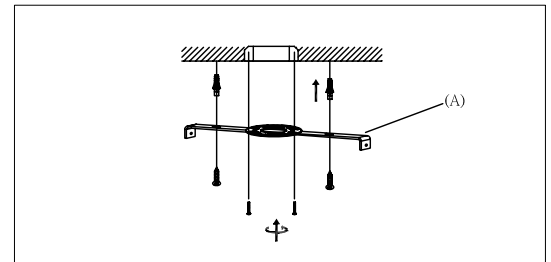


Step.2: Remove the Mounting Bracket (A) from Canopy, and install to electrical box.

3.)

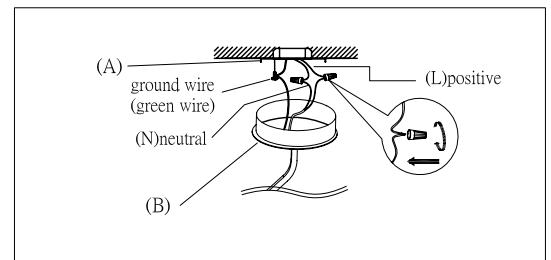

Step.3: Wire fixture to wires in outlet box.  
Install Green wire to Ground Screw.

4.)

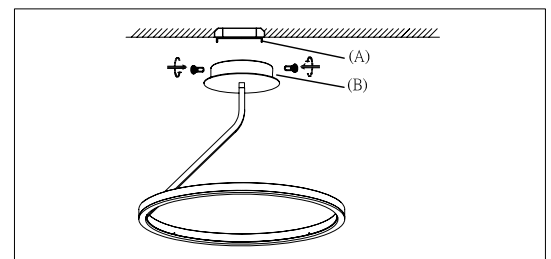

Step 4: Adjust wire length to desired hanging height.  
Install Canopy (B) to Bracket (A) and tighten screws at the ends of canopy to secure.

Cleaning & Care:

Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.