


**PRODUCT DESCRIPTION**

Channels of Black are fused in an erratic fashion concealing a LED light source that emits a soft and even illumination to the surface below. Light intensity is adjustable down to 10% to allow for multiple room scene settings.

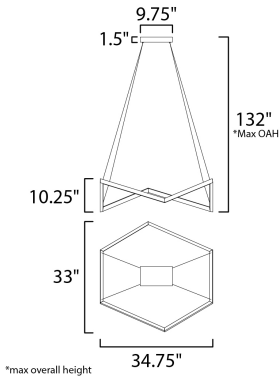

**MEASUREMENTS**

DIMENSION : 34.75" L x 33" W x 10.25" H  
 MAX OAH : 132" OAH  
 CANOPY : 6" W x 1.5" H x 9.75" L  
 HANGING WEIGHT : 7.7 lb

**LAMPING**

INPUT VOLTAGE : 120V  
 LUMENS : 3,500 Rated (2,200 Del.)  
 BULB : 1 x 50W LED PCB Integrated , 50W Total  
 BULB INCLUDED : (Integrated)  
 DIMMABLE : ELV  
 CRI : 80+ CRI  
 COLOR\_TEMP : 3000K

**FINISHES OPTION**

 Black (BK)

**MATERIAL**

Aluminum, Steel

**RATINGS**

cETLus  
 Dry Location



**ADDITIONAL**

ADJUSTABLE  
 SLOPE: 70  
 RATED LIFE 50000 Hours  
 OPERATING TEMPERATURE:  
 -20°C (-4°F), 40°C (104°F)

PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER)  
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746  
 EASTERN DISTRIBUTION CENTER  
 101 GARDNER PARK | PEACHTREE CITY, GA 30269  
 P. 626.956.4200 | F. 626.956.4225 | maximlighting.com