


PRODUCT DESCRIPTION

Channels of Black are fused in an erratic fashion concealing a LED light source that emits a soft and even illumination to the surface below. Light intensity is adjustable down to 10% to allow for multiple room scene settings.

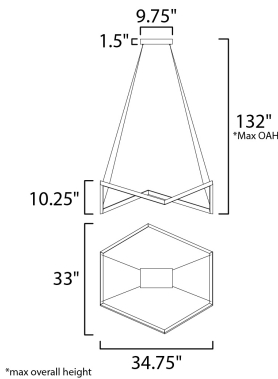

MEASUREMENTS

DIMENSION : 34.75" L x 33" W x 10.25" H
 MAX OAH : 132" OAH
 CANOPY : 6" W x 1.5" H x 9.75" L
 HANGING WEIGHT : 7.7 lb

LAMPING

INPUT VOLTAGE : 120V
 LUMENS : 3,500 Rated (2,200 Del.)
 BULB : 1 x 50W LED PCB Integrated , 50W Total
 BULB INCLUDED : (Integrated)
 DIMMABLE : ELV
 CRI : 80+ CRI
 COLOR_TEMP : 3000K

FINISHES OPTION

 Black (BK)

MATERIAL

Aluminum, Steel

RATINGS

cETLus
 Dry Location



ADDITIONAL

ADJUSTABLE
 SLOPE: 70
 RATED LIFE 50000 Hours
 OPERATING TEMPERATURE:
 -20°C (-4°F), 40°C (104°F)

PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746
 EASTERN DISTRIBUTION CENTER
 101 GARDNER PARK | PEACHTREE CITY, GA 30269
 P. 626.956.4200 | F. 626.956.4225 | maximlighting.com