

ALUMILUX | WALL SCONCE

E41308 | E41328

- ETL/cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Title 24 for outdoor use
- Adjustable plates control beam spread
- Up and down light

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____




E41308



E41328

*ADA Version

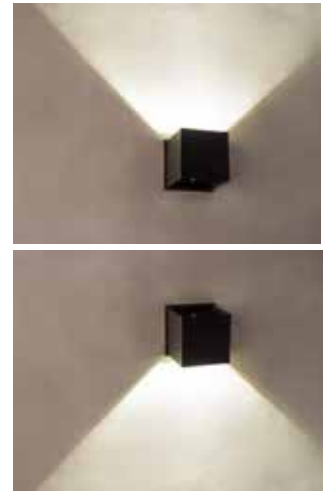

PRODUCT DESCRIPTION

Bring the outdoors inside with our line of Architectural high quality interior and exterior wall sconces. European in design and machined out of blocks of solid Aluminum, these sconces have both the look and quality expected for the discriminate buyer. High powered LEDs create dramatic light effects and most are approved for wet location applications.



MEASUREMENT

MODEL	DIMENSION	HCO
E41308	4.5"W x 4.5"H x 4.25"EXT	2.25"
*E41328	7"W x 6"H x 2.75"EXT	3.00"

HANGING WEIGHT

HCO	WEIGHT
2.25"	2.09 LB
3.00"	4.84 LB

LAMPING

MODEL	BULB TYPE	CRI	INIT.	DEL	LUMENS	COL TEMP.	DIMMABLE	INPUT
E41308	(2) 3W LED (Integrated)	90+	420	316	3000K	No	120V	
*E41328	(2) 3W LED (Integrated)	90+	420	344	3000K	No	120V	

FINISHES OPTIONS:

E41308 Bronze (BZ)
 Satin Aluminum (SA)

*E41328 White (WT)
 Satin Aluminum (SA)



MATERIAL:

Aluminum

AVAILABLE SIZES:

4.5" | 7"

RATINGS:

ETL cETL IP65
 Wet Location
 Title 24 (For Outdoor use)
 ADA* Option (For E41328)



ADDITIONAL:

RATED LIFE: 50,000 Hours
 OPERATING TEMP: -20° C (-4°), 40° C (104° F)
 PHOTOMETRIC: Report Found Online
 INSTALL UP/DOWN: Up
 LIGHTING DIRECT: Directional

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTERS)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | et2online.com